
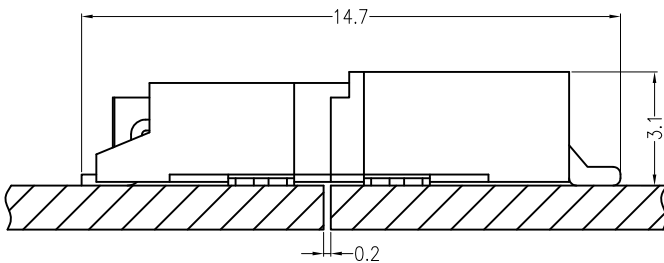
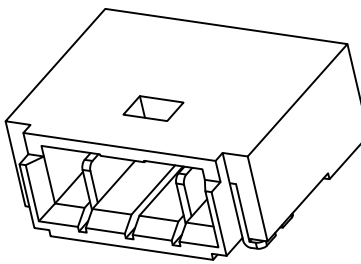
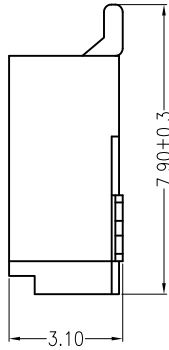


A B C D E F

REV	DESCRIPTION	DESIGN	DATE
A0	Release	吴丹平	2015.07.15

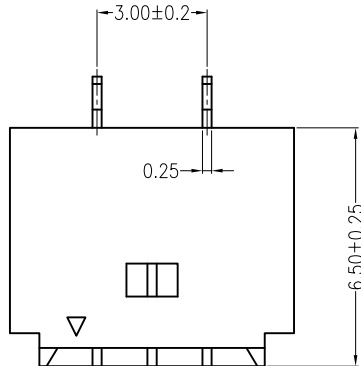

**Assembly Layout**



主要技术参数 Main Specifications

- 线数 (Poles): 02P
- 接触电阻 (Contact resistance):  $\leq 20m\Omega$
- 绝缘电阻 (Insulation resistance):  $\geq 1000M\Omega$
- 额定电压 (Rated voltage): 150 V AC DC
- 额定电流 (Rated current): 1.0A AC DC
- 耐电压 (Withstand Voltage): 1000V AC/minute
- 温度范围 (Temperature Range):  $-25^{\circ}C \sim +105^{\circ}C$

ORDER INFORMATION:

**B3001R-02-F4MB-R**

PART No.:		PACKAGING:	
No. OF CIRCUITS:		R=REEL	
		P=PE	
PLASTIC MATERIAL:		PLATING:	
F4M=LCP E6808 (BEIGE)		B=MATTE Sn	

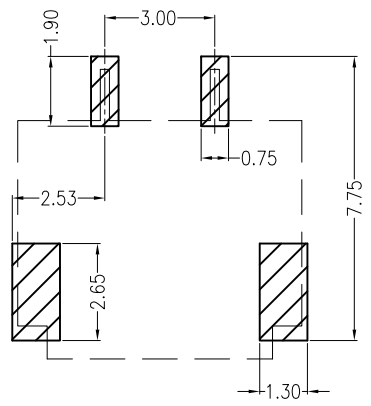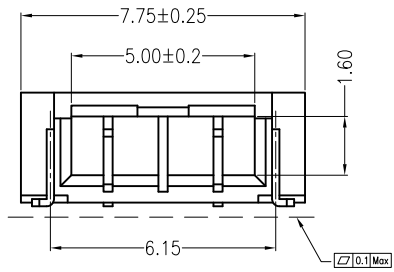

Board Layout  
General Tolerance:  $\pm 0.05$

ITEM	COMPONENT	Q'TY	MATERIAL	FINISH
C	Solder Tab	2 PCS	PhosphorBronze	MATTE Sn-plated
B	CONTACT	2 PCS	PhosphorBronze	MATTE Sn-plated
A	PEDESTAL	1 PCS	LCP E6808	UL 94V-0, COLOR:BEIGE

**JKUN** 温州健坤接插件有限公司  
WENZHOU JKUN CONNECTOR CO., LTD.

TITLE: -  
3.0mmPITCH 90°WAFER SMT TYPE

X.±0.5	X.±5'	USE: CUSTOMER	PART NO.:		
.X±0.3	.X±2'		B3001R-02-F4MB-R		
.XX±0.25	.XX±1'	APPD: 邵敬和	DWG NO.:		
--	--	CHKD: 田峰	JKUN/GCCP-0590		
	UNITS: mm	DR: 吴丹平	SCALE	SHEET	
			1 : 1	1 / 1	

A B C D E F

1  
2  
3  
4  
5

1  
2  
3  
4  
5