



PCB LAYOUT

0.1

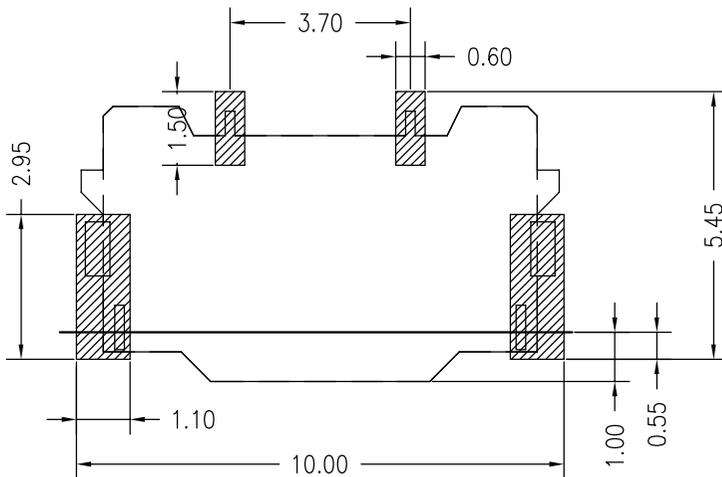

REV	ECN No.	DESCRIPTION	DESIGN	DATE
A0		Release	吴丹平	2017.09.22
A1		修改定位片	曾令青	2018.07.09

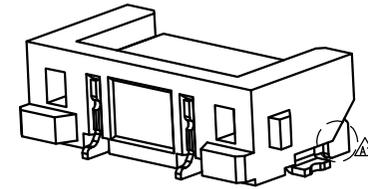

主要技术参数 Main Specifications

线数 (Poles): 02

接触电阻 (Contact resistance): $\leq 30m\Omega$

绝缘电阻 (Insulation resistance): $\geq 1000M\Omega$


额定电压 (Rated voltage): 500V AC DC

额定电流 (Rated current): 2A AC DC

耐电压 (Withstand Voltage): 1500V AC/minute

温度范围 (Temperature Range): $-40^{\circ}C \sim +85^{\circ}C$

ORDER INFORMATION:

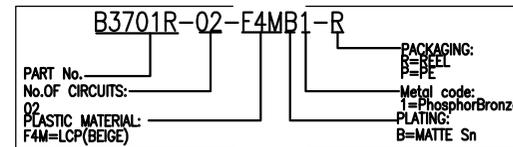

ITEM	COMPONENT	Q'TY	MATERIAL	FINISH
C	SOLDER TAB	2 PCS	PhosphorBronze	MATTE Sn
B	CONTACT	2 PCS	PhosphorBronze	MATTE Sn
A	HOUSING	1 PCS	LCP	UL 94V-0, COLOR:BEIGE

JKUN 温州健坤接插件有限公司
WENZHOU JKUN CONNECTOR CO., LTD.

TITLE: B3701R-02
 3.7mmPITCH 90°WAFER SMT TYPE

X.±0.5	X.±5'	USE: CUSTOMER	PART NO.:	
.X±0.3	.X±2'		B3701R-02-F4MB1-R	
.XX±0.25	.XX±1'	APPD: 谭龙清	DWG NO.:	
--	--	CHKD: 田峰	JKUN-GCKH-0744	
	UNITS: mm	DR: 蒋建银	SCALE	SHEET
			1 : 1	1 / 1