
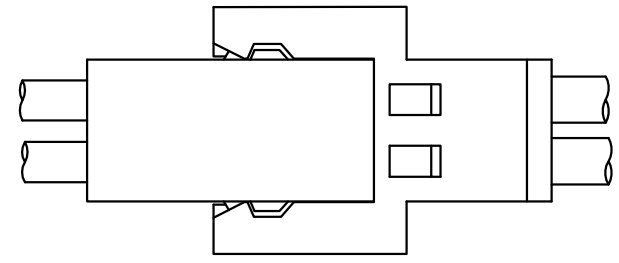
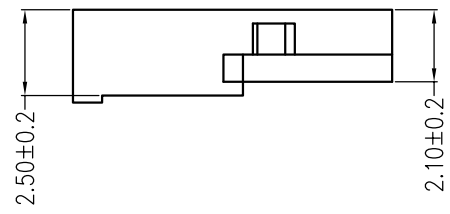


REV	ECN No.	DESCRIPTION	DESIGN	DATE
A0		Release	吴丹平	2017.04.24

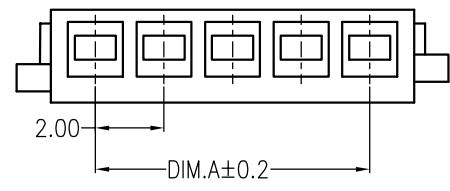

Assembly Layout



主要技术参数 Main Specifications

- 线 数 (Poles): 02 to 16
- 接触电阻 (Contact resistance): $\leq 20m\Omega$
- 绝缘电阻 (Insulation resistance): $\geq 1000M\Omega$
- 额定电压 (Rated voltage): 125V AC DC
- 额定电流 (Rated current): 2.0A AC DC
- 耐 电压 (Withstand Voltage): 500V AC/minute
- 温度范围 (Temperature Range): $-25^{\circ}C \sim +85^{\circ}C$

ORDER INFORMATION:

C2001P--A5W-P**

PART No. _____	PACKAGING: P=PE
No. OF CIRCUITS: 05	PLASTIC MATERIAL: A5W=PA66 (White)

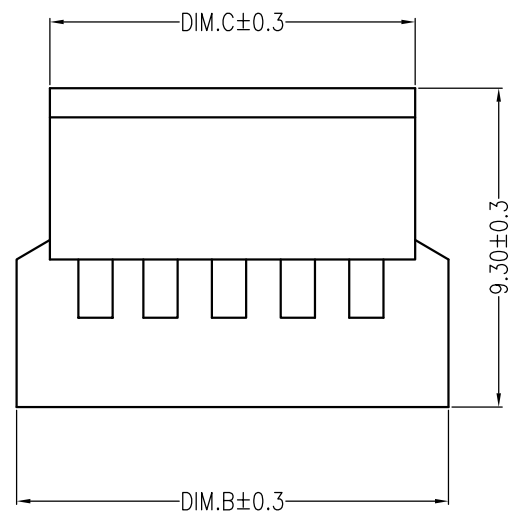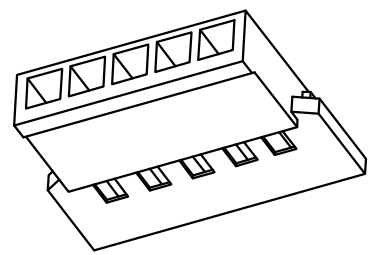

Circuits	Dimensions (mm)		
	A	B	C
02	2.00	6.60	4.65
03	4.00	8.60	6.65
04	6.00	10.60	8.65
05	8.00	12.60	10.65
06	10.00	14.60	12.65
07	12.00	16.60	14.65
08	14.00	18.60	16.65
09	16.00	20.60	18.65
10	18.00	22.60	20.65
11	20.00	24.60	22.65
12	22.00	26.60	24.65
13	24.00	28.60	26.65
14	26.00	30.60	28.65
15	28.00	32.60	30.65
16	30.00	34.60	32.65

ITEM	COMPONENT	Q'TY	MATERIAL	FINISH
C				
B				
A	HOUSING	1 PCS	PA66	COLOR:WHITE

JKUN 温州健坤接插件有限公司 WENZHOU JKUN CONNECTOR CO., LTD.		TITLE: 2.0mmPITCH Housing	
X.±0.5	X.±5'	USE: CUSTOMER	PART NO.: C2001P-**-A5W-P
.X±0.3	.X±2'	APPD: 邵敬和	DWG NO.: JKUN/GCCP-0596
.XX±0.25	.XX±1'	CHKD: 田 峰	SCALE: 1 : 1
--	--	DR: 吴丹平	SHEET: 1 / 1
UNITS: mm			

A | B | C | D | E | F

1

2

3

4

5

1

2

3

4

A | B | C | D | E | F