

A

B

C

D

E

F

REV	DESCRIPTION	DESIGN	DATE
A0	Release	吴丹平	2016.07.04

1

2

3

4

5




1

2

3

4

5

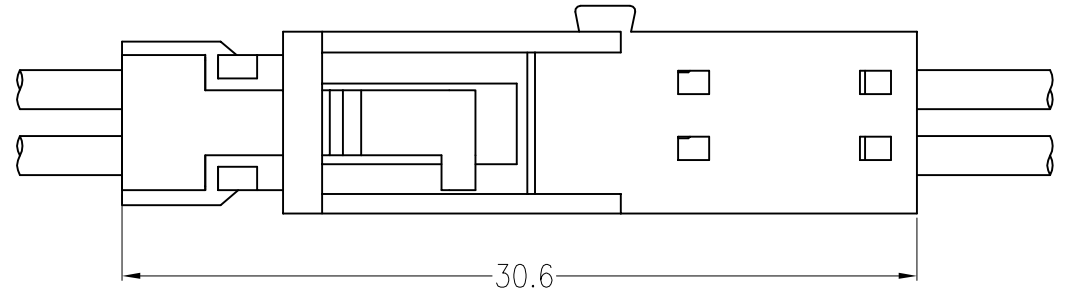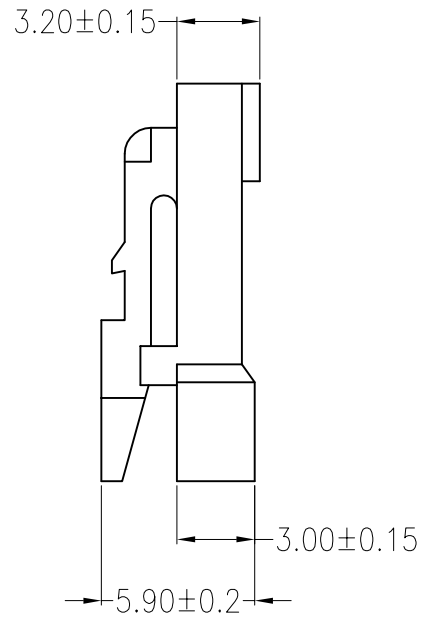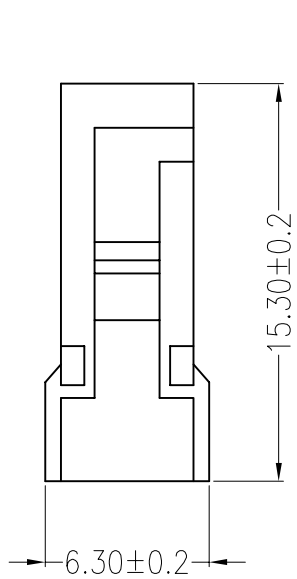

## Assembly Layout

### 主要技术参数 Main Specifications

线 数 (Poles): 02

接触电阻 (Contact resistance):  $\leq 20m\Omega$

绝缘电阻 (Insulation resistance):  $\geq 1000M\Omega$

额定电压 (Rated voltage): 250V AC DC



额定电流 (Rated current): 3.0A AC DC

耐 电压 (Withstand Voltage): 1500V AC/minute

温度范围 (Temperature Range) :  $-25^{\circ}C \sim +85^{\circ}C$

### ORDER INFORMATION:

<b>C2542P-02-A6W-P-1</b>			
PART No.		PACKAGING:	1=大口
No. OF CIRCUITS:	02	PACKAGING:	P=PE
		PLASTIC MATERIAL:	A6W=PA66 (WHITE)

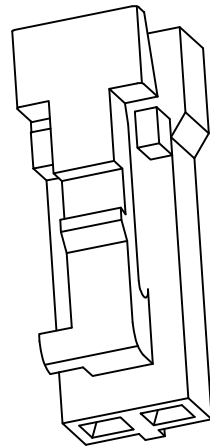

ITEM	COMPONENT	Q'TY	MATERIAL	FINISH
C				
B				
A	PEDESTAL	1 PCS	PA66	
<b>JKUN 温州健坤接插件有限公司</b> <b>WENZHOU JKUN CONNECTOR CO., LTD.</b>				TITLE: -
X.±0.5	X.±5'	USE:	CUSTOMER	
.X±0.3	.X±2'	APPD:	邵敬和	
.XX±0.25	.XX±1'	CHKD:	田 峰	
--	--	DR:	蒋建银	
	UNITS:	mm		
			SCALE	SHEET
			1 : 1	1 / 1

A

B

C

D

E

F