
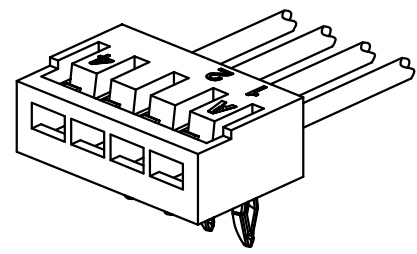
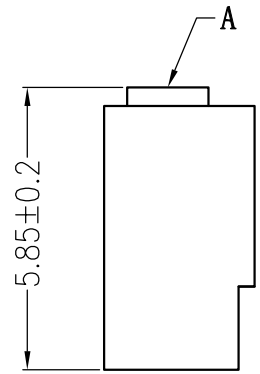


| REV | DESIGN | DATE |
|-----|--------|------------|
| A0 | 吴丹平 | 2017.03.23 |
| - | - | - |


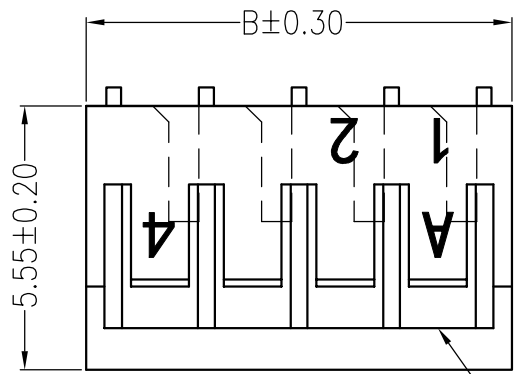


主要技术参数 Main Specifications

- 线 数 (Poles): 02 to 16
- 接触电阻 (Contact resistance): $\leq 20m\Omega$
- 绝缘电阻 (Insulation resistance): $\geq 1000M\Omega$
- 额定电压 (Rated voltage): 250V AC DC
- 额定电流 (Rated current): 2.0A AC DC
- 耐 电 压 (Withstand Voltage): 800V AC/minute
- 温度范围 (Temperature Range): $-25^{\circ}C \sim +85^{\circ}C$

ORDER INFORMATION:

| | | |
|------------------------|--|-------------------|
| B2002Y-**-A6W-P | | |
| PART No.: | | PACKAGING: |
| No. OF CIRCUITS: | | P=PE |
| 02~13 | | PLASTIC MATERIAL: |
| | | A6W=PA66 (WHITE) |

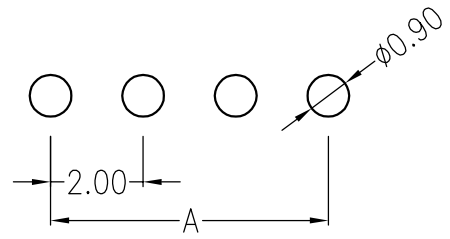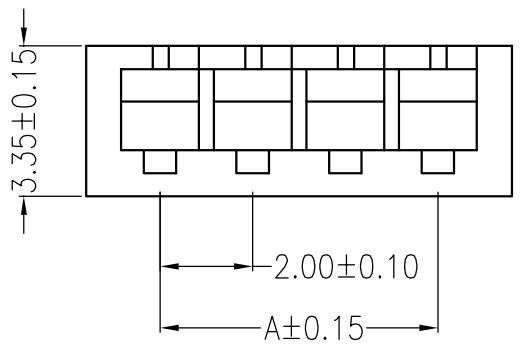

SUGGESTED PCB LAYOUT
(COMPONENT SIDE)

| Circuits | Dimensions (mm) | |
|----------|-----------------|-------|
| | A | B |
| 02 | 2.00 | 4.70 |
| 03 | 4.00 | 6.70 |
| 04 | 6.00 | 8.70 |
| 05 | 8.00 | 10.70 |
| 06 | 10.00 | 12.70 |
| 07 | 12.00 | 14.70 |
| 08 | 14.00 | 16.70 |
| 09 | 16.00 | 18.70 |
| 10 | 18.00 | 20.70 |
| 11 | 20.00 | 22.70 |
| 12 | 22.00 | 24.70 |
| 13 | 24.00 | 26.70 |
| 14 | 26.00 | 28.70 |

| ITEM | COMPONENT | Q'TY | MATERIAL | FINISH |
|---|-----------|-------|----------|-------------------------------------|
| A | HOUSING | 1 PCS | PA66 | UL 94V-0, COLOR:WHITE |
| JKUN 温州健坤接插件有限公司 WENZHOU JKUN CONNECTOR CO.,LTD. | | | | TITLE: - 2.00mm PITCH 90°HOUSING |
| X.±0.5 | X.±5' | USE: | CUSTOMER | |
| .X±0.3 | .X±2' | APPD: | 邵敬和 | |
| .XX±0.25 | .XX±1' | CHKD: | 曾令青 | |
| -- | -- | DR: | 蒋建银 | |
| UNITS: mm | | SCALE | SHEET | |
| | | 1 : 1 | 1 / 1 | |